

# Water Purification

- Basic Water Still** ..... 2
- Classic Water Still** ..... 3
- Water Purification Systems** ..... 5
  - Reverse Osmosis (RO) ..... 5
  - Ultra Pure (UP) ..... 6
  - Ultra Pure (UP) & Pure (RO) ..... 7

## Water Still



**“W4L”** Model  
4L Basic Water Still,  
with 304 Stainless-Steel Heater



**“WCS”** Model  
4 & 8L Cabinet Water Still,  
with Pure Silica / Quartz Heater



**“CWS”** Model  
With PP 1µm pore Cartridge Prefilter  
3.5 & 7.5 L/hr

**“WWS-P”** Model  
With PP 1µm pore Cartridge Prefilter  
4, 8 & 12 L/hr



## Water Purification System



**Reverse Osmosis (RO)**  
“New-P.NIX RO”



**Ultra Pure (UP)**  
“New-P.NIX UP”




**Ultra Pure (UP) & Pure (RO)**  
“New-P.NIX Power”

SciLab® Laboratory Basic Water Still “W4L”, with 304 Stainless-steel Heater, 4 Lit/hr, 3.0 ~ 4.0 μS/cm  
Suitable for Bench & Wall Mounting, Borosilicate Glass Boiler,



4Lit Basic Water Still, with 304 Stainless-steel Heater



■ Supplied by SciLab Korea ■ Connect and Operate Directly from Tap Water

■ Heat Resistant Borosilicate Glass Boiler fitted with 3kW 304 Stainless-steel Heater.

- \* High Efficiency Coil Condenser ensures Low Temperature, High Output Quality Distillate of Conductivity 3 to 4 μS/cm.
- \* Compact Construction Suitable for Bench and wall Mounting
- \* Built-in Constant Level Device with Schott Vendura-Nova Valve for Drainage provides Easy Descaling without Dismantling
- \* Safety Thermostat Built into the Heater protects the Water Still in the Event of Water Supply Failure and Automatically Resets when the Water Supply is restored.
- \* Borosilicate Glass Boiler and High-efficiency Condenser ensure the Highest in Distillate Purity.

Spec.	Model	“W4L”
Distillate Output		4 Liters/hour
Quality of Distillate : pH / Conductivity Resistivity / Temperature Pyrogen Content		5.0 ~ 6.5 pH / 3.0 ~ 4.0 μS/cm 0.25 ~ 0.30 MΩ·cm / 25 ~ 35°C Pyrogen Free
Water Supply Requirement		1 Liter/min, minimum 3psi (0.2 bar)
Dimensions (W × D × H), Weight		500 × 150 × h450 mm, 5.25kg
Power Supply		220/240V, 50/60Hz, 3kW
Cat. No.		SL.Wat201


Spare Accessory

- |             |                            |             |                   |
|-------------|----------------------------|-------------|-------------------|
| SL.Wat201.1 | (1) Stainless-steel Heater | SL.Wat201.4 | (4) Glass Boiler  |
| SL.Wat201.2 | (2) Strap                  | SL.Wat201.5 | (5) Condenser     |
| SL.Wat201.3 | (3) Metal Flange           | SL.Wat201.6 | (6) Support Stand |

SciLab® Cabinet Water Still “WCS”, with Silica / Quartz Heater, Pyrogen-free, 4 & 8 Lit/hr, 1.2 ~ 2.0 μS/cm  
Suitable for Bench & Wall Mounting, Heat Resistant Borosilicate Glass Boiler,



4 & 8Lit. Cabinet Water Still, with Pure Silica / Quartz Heater.

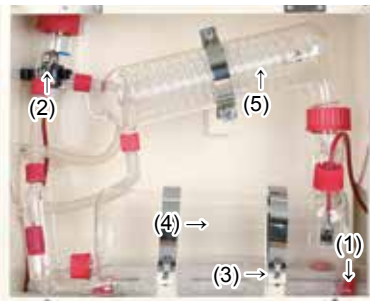

■ Supplied by SciLab Korea ■ Excellent Quality Glassware made from Borosilicate Glass

■ Safety Circuits cut off Electrical Power to Heaters and Trigger Audible and Visual Alarms in the Event of Water Supply Failure or High Boiler Temperature

- \* Robustly built Epoxy-coated Steel Cabinet as Protective Housing adds a Touch Elegance to the Exquisite Water Still
- \* Horizontal Thick Walled, Heat Resistant Borosilicate Glass Boiler fitted with two 1.5kW Silica Heaters
- \* High Efficiency Coil Condenser ensures Low Temperature, High Output Quality Distillate
- \* Screwthread Connectors enable Easy Fitting or Removal of Houses Safely and Leak Free Operation
- \* Built-in Constant Level Device with Schott Vendura-Nova valve for Drainage provides Efficient Boiler operation, Over Flow Protection and Easy Descaling without Dismantling
- \* Visual Flow Control Valve for Setting Water Supply Input for Maximum Operation Efficiency
- \* Float Switch activates Safety Circuits in the Event of Water Supply Failure. Automatically resets when Water Supply is restored
- \* Temperature-sensitive Thermal Switch as Back-up Protection which Activates Safety Circuits in the event of Abnormally High Boiler Temperature. Automatically resets when Boiler Temperature returns to Normal
- \* High Quality Electrical Components from Reputable Manufacturers meeting International Specifications and Standards

Spec.	Model	“WCS4L”	“WCS8L”
Distillate Output		4 Liters/hour	8 Liters/hour
Quality of Distillate : pH Conductivity Pyrogen Content Temperature		5.0 ~ 6.5 pH 1.2 ~ 2.0 μS/cm Pyrogen Free 25 ~ 35°C	
Water Supply Requirement		1 Liter/min, minimum 3psi (0.2 bar)	
Dimensions (W × D × H) , Weight		500 × 225 × h395 mm, 14.90kg	500 × 330 × h395 mm, 17.90kg
Power Supply		220/240V, 50/60Hz, 3kW	220/240V, 50/60Hz, 6kW
Cat. No.		SL.Wat203	SL.Wat205

Spare Accessory for 4 & 8 Lit Common Use

- |             |                           |             |                  |
|-------------|---------------------------|-------------|------------------|
| SL.Wat203.1 | (1) Silica Heater         | SL.Wat203.4 | (4) Glass Boiler |
| SL.Wat203.2 | (2) Vertical Float Switch | SL.Wat203.5 | (5) Condenser    |
| SL.Wat203.3 | (3) Foam Strap            |             |                  |

DAIHAN® Electric Classic Water Still, "WWS", Built-in Prefilter & Auto On/Off system  
 For Laboratory Water, Pyrogen-free, 0.3MΩ·cm(resistivity), pH5.4 to 7.3, Capa. 4 · 8 · 12 Lit/hr  
 (1) with Stainless-steel 100 mesh Prefilter, (2) with PP 1µm pore Cartridge Prefilter,




(1) with Stainless-steel 100 mesh Prefilter, "WWS-S": 4 · 8 · 12 Lit/hr



(2) with PP 1µm pore Cartridge Prefilter, "WWS-P": 4 · 8 · 12 Lit/hr

- Made in Korea    ■ 2-Year Warranty
  - High-performance / All Stainless-steel (SUS-430/304) models : Designed for the Durability & Consistent Quality
  - "WWS-S" models, Built-in Stainless-steel(SUS-304) Prefilter Kit, interchangeable 100 mesh (150µm) : Remove Particles & Scale-forming impurity.
  - "WWS-P" models, Built-in PP(Polypropylene) 1µm Prefilter / Cartridge Kit, interchangeable : Remove Rust, Particles & Scale-forming impurity.
  - All Models, Complete Set with :
    - ① Stainless-steel Unit Kit , ② External Consistent-Level Device,
    - ③ Drain Valve, ④ Prefilter Kit,
    - ⑤ 2m Feeding Water Tubing (Silicone) Assembly for Connection of Water Tap φ15 or φ19 mm,
    - ⑥ PP Un-equal Tapered Connector φ8,10,12 / 14,16mm-for Different Diameter Tubings
  - Auto On/Off with Water Level Sensor/Micro Level Sensor.
- \* This space-saving horizontal condenser was designed for durability and consistent quality  
 \* Energy saving features include a condenser that preheats the feedwater and a double-walled evaporator.  
 \* A low water cutoff protects heating elements from burn-out when water supply is interrupted  
 \* Stainless-steel Heater Built-in 0.4mm Ni/Cr. Element, Boiler, Efficient Energy and Water Consumption.  
 \* Sealing : Silicone O-ring packing.



Stainless-steel Filter Kit & P.P Filter Kit



Ex> Installation of Water Still

Specifications & Ordering information

Spec.	Model	(1) With Stainless steel 100 mesh Prefilter			(2) With PP 1µm pore Cartridge Prefilter		
		"WWS-S4"	"WWS-S8"	"WWS-S12"	"WWS-P4"	"WWS-P8"	"WWS-P12"
Capacity(Water)		4 Lit/hr	8 Lit/hr	12 Lit/hr	4 Lit/hr	8 Lit/hr	12 Lit/hr
Filter	Function Material Housing Pore size Heat-resisting	Remove Particles & Scale-forming impurity Stainless-steel, SUS304 POM(Polyoxymethylene) 150µm(100 mesh) -29°C ~ +85°C			Remove Rust, Particles & Scale-forming impurity PP(Polypropylene) PE(Polyethylene) 1µm 85°C		
Water Purity		0.3MΩ·cm (resistivity), pH5.4 to 7.3					
Level Sensor		Auto On/Off with Water Level Sensor / Micro Level Sensor					
Material	Boiler Condenser Base	SUS-430 SUS-304 SUS-430	SUS-430 SUS-304 Aluminum		SUS-430 SUS-304 SUS-304	SUS-430 SUS-304 Aluminum	
Size	Condenser(only)	φ 85 × L375	φ 120 × L430	φ 120 × L490	φ 85 × L375	φ 120 × L430	φ 120 × L490
	Body	φ 350 × h670	φ 350 × h760	φ 350 × h760	φ 400 × h670	φ 400 × h760	φ 400 × h760
Heater		3kW	6kW (3kW×2Ea)	9kW (3kW×3Ea)	3kW	6kW (3kW×2Ea)	9kW (3kW×3Ea)
Plug Style		Plug Code "C"	Plug Code "F"		Plug Code "C"	Plug Code "F"	
Electrical Reqts.		1 Phase, AC 220 V, 60 Hz					
Cat. No.	220V	DH.WWS01004	DH.WWS01008	DH.WWS01012	DH.WWS02004	DH.WWS02008	DH.WWS02012

Spare Prefilter & Optional Storage Bottle

- DH.WWS10101 (a) Spare, Stainless-steel 100 mesh Prefilter Kit, "SF101", POM Housing φ36×h61mm, SUS-304 Filter only φ22×h46mm  
 DH.WWS10102 (b) , PP 1µm pore Cartridge Prefilter & Housing Kit, "PF102", PE Housing φ110×h300mm, PP Filter only φ60×h252mm  
 DH.WWP.10PF Spare, PP 1µm pore Cartridge Prefilter, "PF103", φ(od.) PP Filter 60×φ(id.) 30×h252mm  
 DH.WWS10104 , PE Housing only, "PF104", φ110×h300mm
- SL.Bot3102 Optional, Bottle, HDPE, Aspiration, White, 5L, Neck id-φ70, φ200×h360mm  
 SL.Bot3103 , 10L, -φ70, φ250×h460mm  
 SL.Bot3104 , 20L, -φ95, φ300×h555mm  
 SL.Bot3105 , 50L, -φ95, φ380×h700mm

**DAIHAN® 3.5 & 7.5 Lit/hr Electric Classic Water Still “CWS”, Compact Cabinet-type, All Stainless Steel**  
 Good for Laboratory Water, Double Wall Still Chamber, Built-in PP 1 $\mu$ m pore Cartridge Prefilter, Auto On/Off System



3.5 & 7.5 Lit/hr Cabinet-type Water Still “CWS”

- **Made in Korea**
- **All Stainless-steel for Corrosion Resistance**
- **Double-walled Chamber Structure for Protects Burn Injuries**
- **High-performance & Compact Design**
- \* Designed for the Durability & Consistent Quality
- \* Built-in Interchangeable PP(Polypropylene) 1 $\mu$ m Prefilter Cartridge Kit
- \* Condenser and Boiler are Separable for Easy Cleaning and Maintenance
- \* Auto Heater On/Off with Water Level Sensor & OPT Sensor
- \* Pre-filter Removes Rust, Particles & Scale-forming Impurity
- \* Economical Energy and Water Consumption
- \* Built in Low water Sensor for Protects Heating Elements
- \* Sealing : Silicone Gasket

**Specifications & Ordering information**

Spec.	Model	“CWS-4”	“CWS-8”
<b>Capacity</b>		Max. 3.5 Lit / hr	Max. 7.5 Lit / hr
<b>Cooling Water</b>		30 ~ 50 Lit	60 ~ 80 Lit
<b>Filter</b>	<b>Function</b>	Remove Rust, Particles & Scale-forming Impurity	
	<b>Material</b>	PP (Polypropylene)	
	<b>Housing</b>	PC (Polycarbonate) Bottle + PP (Polypropylene) Lid	
	<b>Pore size</b>	1 $\mu$ m	
	<b>Heat-resisting</b>	85 $^{\circ}$ C	
<b>Water Purity</b>		0.3M $\Omega$ -cm (resistivity), pH5.4 to 7.3	
<b>Level Sensor</b>		Auto On / Off with Water Level Sensor / Micro Level Sensor	
<b>Material</b>	<b>Interior</b>	Stainless-steel	
	<b>Exterior</b>	Stainless-steel Hair Lined with Powder Coating	
	<b>Heater</b>	Stainless-steel Pipe	
<b>Safety</b>		Low Water & Over Temperature Protection, Electric Leakage Circuit Breaker	
<b>Dimension(w×d×h)</b>		430×315×h570 mm	445×325×h630 mm
<b>Net Weight</b>		12 kg	18 kg
<b>Packing Size(w×d×h)</b>		440×370×h610 mm	450×380×h670 mm
<b>Gross Weight</b>		13 kg	19 kg
<b>Power Consumption</b>		3 kW	6 kW
<b>Plug Style</b>		Plug Code “C”	Plug Code “F”
<b>Electric Reqts.</b>		220 V, 50 / 60 Hz, 1 Phase	
<b>Cat. No.</b>		<b>DH.WatS8001</b>	<b>DH.WatS8002</b>



Plug Code“C”



Plug Code“F”



(1) Cartridge Prefilter & PE Housing



(2) HDPE Storage Bottle 5~50L

**(1) Spare Prefilter**

**DH.WatA1001** PP 1 $\mu$ m pore Cartridge Prefilter Housing Kit, “CWS-A1001”

**DH.WatA1002** PP 1 $\mu$ m pore Cartridge Prefilter Only, “CWS-A1002”

**DH.WatA1003** Housing Only, PC Bottle & PP Lid “CWS-A1003”

**(2) Optional HDPE Storage Bottle**

**SL.Bot3102** Bottle, Aspiration, White, 5L , Neck id- $\phi$ 70,  $\phi$ 200×h360 mm

**SL.Bot3103** , 10L, - $\phi$ 70,  $\phi$ 250×h460 mm

**SL.Bot3104** , 20L, - $\phi$ 95,  $\phi$ 300×h555 mm

**SL.Bot3105** , 50L, - $\phi$ 95,  $\phi$ 380×h700 mm

**“New-P.NIX® RO(Reverse Osmosis)” Water Purification System, 15 · 25 · 35-L/hr**

With Pretreatment System, 2-Steps of Filter Exchange Indicator, (RO) Product 0.2 ~ 30µs/cm,



Included Pretreatment System 'HMC-PT1'

- Made in Korea    ■ Certified CE, ISO 9001, ISO 14001
- Built-In RS 232C Port and Volumetric Dispensing Function by Timer, Included Level sensor
- Auto Regular Recycling to Maintain the Optimum water Quality Level
- Programming by 2 Steps for the Filter Exchange
- Filter Replace Message Indicating by LCD Display & Blinking LED Light

\* Microprocess One Touch Technology Controller    \* 16×4 Characters Backlight LCD Digital Display  
 \* Awarded the Korean Excellent Products  
 \* Included Pretreatment System HMC-PT1, 14" Super A/C Filter, RO Pack

**Specifications & Ordering information**

Spec.	Model	“New-P.NIX RO 180” Max. Daily Volume. (Max. 60L/day)	“New-P.NIX RO 280” Max. Daily Volume. (Max. 100L/day)	“New-P.NIX RO 380” Max. Daily Volume. (Max. 120L/day)
Certified Mark	CE, ISO 9001, ISO 14001			
Product Flow Rate(RO)		Max. 15L/Hr.	Max. 25L/Hr.	Max. 35L/Hr.
Daily Volume		60L/day	100L/day	120L/day
Water Quality Display	• RO Product : 0.2 to 250.0µs/cm • Feed water : 10 to 1000µs/cm • Temperature : 0 to 99.9°C			
Display	16×4 Characters Backlight LCD Digital Display			
Controller	Microprocess One Touch Technology			
Dimensions (w×d×h)	300×460×h 470mm			
Power	210~230V, 50/60 Hz, 60W			
Cat. No.		DH.WWP.RO180	DH.WWP.RO280	DH.WWP.RO380

**Optional Accessory**

- SL.Bot3102 (1) Bottle, HDPE, Aspiration, White, 5L, Neck id-φ70, φ200×h360mm  
 SL.Bot3103 , 10L, -φ70, φ250×h460mm  
 SL.Bot3104 , 20L, -φ95, φ300×h555mm  
 SL.Bot3105 , 50L, -φ95, φ380×h700mm  
 SL.Bot3106 (2) Bottle, HDPE, Aspiration, Amber, 5L, Neck id-φ70, φ200×h360mm  
 SL.Bot3107 , 10L, -φ70, φ250×h460mm  
 SL.Bot3108 , 20L, -φ95, φ300×h555mm  
 SL.Bot3109 , 50L, -φ95, φ380×h700mm



(1) White, HDPE Aspiration Bottle    (2) Amber, HDPE Aspiration Bottle




(3) 14" Super A/C Filter

**Spare Filter**

Cat. No.	Description	Filter Replace Period
DH.WWP.PR14AC	(3) 14" Super A/C Filter	Approx. 3~4 Month
DH.WWP.10PF	(4) 10" Prefilter for HMC-PT1	20 ~ 40 Day
DH.WWP.ROM1	(5) P.NIX RO Pack I for DH.WWP.RO180	Approx. 1 Year
DH.WWP.ROM2	(6) P.NIX RO Pack II for DH.WWP.RO280	
DH.WWP.ROM3	(7) P.NIX RO Pack III for DH.WWP.RO380	


• The above mentioned Filter replacement period can be changed according to various factors such as feed water condition, producing volume and so on.



(4) 10" Prefilter



(5) P.NIX RO Pack I

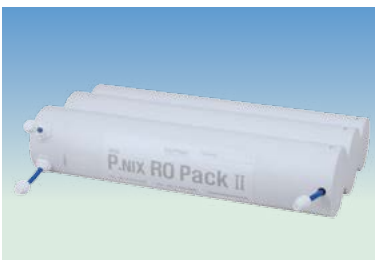

(6), (7) P.NIX RO Pack II, III

## “New-P.NIX® UP 900” Ultra Pure(UP) Water Purification System, Max 1.5L/min With Total Organic Carbon(TOC), 2-Steps of Filter Exchange Indicator, (UP) Up to 18.3MΩ·cm, 초순수 제조장치



- Made in Korea    ■ Certified CE, ISO 9001, ISO 14001
- RS 232C Port and Volumetric Dispensing Function by Timer
- Auto Regular Recycling to Maintain the Optimum water Quality Level
- Programming by 2 Steps for the Filter Exchange
- Filter Replace Message Indicating by LCD Display & Blinking LED Light

- \* Microprocess One Touch Technology Controller
- \* 16×4 Characters Backlight LCD Digital Display
- \* Obtain GD, QD Mark, Awarded the Korean Excellent Products
- \* Included 0.2μm Final Capsule Filter, UP Membrane Pack
- \* Prerequisite : Pure Water is Required (DH.WWP.RO180)

### Specifications & Ordering information


Spec.	Model	New-P.NIX UP 900			
		Scholar-type	UV-type	Bio-type	Integrate-type
Certified Mark		CE, ISO 9001, ISO 14001			
Product Flow Rate(UP)		Max. 1.5L/min			
Water Quality Display		• UP Product : Up to 18.3MΩ·cm • Feed water : 0 to 250 μS/cm • Temperature : 0 to 99.9℃			
Display		16×4 Characters Backlight LCD Digital Display			
Included Filter Composition		• 0.2μm Final Capsule Filter • UP Pack (DH.WWP.UPS)	• 0.2μm Final Capsule Filter • UP Pack (DH.WWP.UPU) • 254/185UV Lamp	• 0.2μm Final Capsule Filter • UP Pack (DH.WWP.UPS) • MW 5000 UF Filter(L)	• 0.2μm Final Capsule Filter • UP Pack(DH.WWP.UPI) • 254/185UV Lamp • MW 5000 UF Filter(L)
Controller		Microprocess One Touch Technology			
Dimensions (w×d×h)		300×500×h 470mm			
Power		210~230V, 50/60 Hz			
Cat. No.		DH.WWP.UPS	DH.WWP.UP.U	DH.WWP.UP.B	DH.WWP.UP.I



(1) White, HDPE Aspiration Bottle    (2) Amber, HDPE Aspiration Bottle



(3) 0.2μm Final Capsule Filter

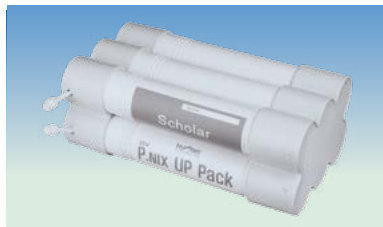

(4) P.NIX UP Pack, Scholar / Bio



(5) P.NIX UP Pack, Scholar-UV / Integrate

- TOC monitoring system is also available for the Integrate-type on request. (TOC monitoring display range : 0~200ppb)

### Optional Accessory

SL.Bot3102	(1) Bottle, HDPE, Aspiration, White, 5L, Neck id-φ70, φ200×h360mm
SL.Bot3103	, 10L, -φ70, φ250×h460mm
SL.Bot3104	, 20L, -φ95, φ300×h555mm
SL.Bot3105	, 50L, -φ95, φ380×h700mm
SL.Bot3106	(2) Bottle, HDPE, Aspiration, Amber, 5L, Neck id-φ70, φ200×h360mm
SL.Bot3107	, 10L, -φ70, φ250×h460mm
SL.Bot3108	, 20L, -φ95, φ300×h555mm
SL.Bot3109	, 50L, -φ95, φ380×h700mm

### Spare Filter & UV Lamp

Cat. No.	Description	Filter Replace Period
DH.WWP.0.2CF	(3) 0.2μm Final Capsule Filter	Approx. 6~8 Month
DH.WWP.UPS	(4) P.NIX UP Pack, Scholar / Bio	Approx. 1 Year
DH.WWP.UPU	(5) P.NIX UP Pack, Scholar-UV / Integrate	
DH.WWP.MWL	MW 5000 UF Filter(L)	Approx. 6~8 Month
DH.WWP.UV	254/185 UV Lamp	Approx. 3 Year

- The above mentioned Filter replacement period can be changed according to various factors such as feed water condition, producing volume and so on.

## “New-P.NIX® Power” Ultra Pure(UP) & Pure(RO) Water Purification All-in-One System, Max 15L/hr With Pretreatment System, 2-Steps of Filter Exchange Indicator, (RO) 0.2 ~ 250 μs/cm, (UP) Up to 18.3MΩ·cm,



(3) 10" A/C Filter (4) 10" Prefilter



(5) P.NIX RO Pack I



(6) 0.2 μm Final Capsule Filter



(7), (8) P.NIX UP Pack

- Made in Korea ■ Certified CE, ISO 9001, ISO 14001
- Built-In RS 232C Port and Volumetric Dispensing Function by Timer, Included Level sensor
- Auto Regular Recycling to Maintain the Optimum water Quality Level
- Programming by 2 Steps for the Filter Exchange
- Filter Replace Message Indicating by LCD Display & Blinking LED Light
- Self-Diagnosis for Ext- & Int-System, Auto Cleaning, Auto Sensor Calibration

\* Microprocess One Touch Technology Controller \* 16×4 Characters Backlight LCD Digital Display

\* Awarded the Korean Excellent Products

\* Included Pretreatment System HMC-PT-3, RO Pack, UP Pack, 0.2 μm Final Filter

### Specifications & Ordering information

Spec.	Model	New-P.NIX Power I			
		Scholar-type	UV-type	Bio-type	Integrate-type
Certified Mark		CE, ISO 9001, ISO 14001			
Product Flow Rate (RO & UP)		Max. 15L/Hr.			
Water Quality Display		• Pure water(RO) : 0.2 ~ 250 μs/cm • Ultra Pure water(UP) : Up to ≤18.3MΩ·cm • Feed water : 0 to 990 μs/cm • Temperature : 0 to 99.9°C			
Included Filter Composition		• Pretreatment System HMC-PT-3 • RO Pack • 0.2 μm Final Filter • UP Pack(Scholar)	• Pretreatment System HMC-PT-3 • RO Pack • 0.2 μm Final Filter • UP Pack(S-UV) • 254/185 UV Lamp	• Pretreatment System HMC-PT-3 • RO Pack • 0.2 μm Final Filter • UP Pack(BIO) • MW5000UF filter(M)	• Pretreatment System HMC-PT-3 • RO Pack • 0.2 μm Final Filter • UP Pack(INT) • 254/185 UV Lamp • MW5000UF filter(M)
Display		16×4 Characters Backlight LCD Digital Display			
Controller		Microprocess One Touch Technology			
Dimensions (w×d×h)		395×500×h 470mm			
Power		210~230V, 50/60 Hz			
Cat. No.		DH.WWP.POWER.S	DH.WWP.POWER.U	DH.WWP.POWER.B	DH.WWP.POWER.I

• Product Flow Rate 25L/Hr. and 35L/Hr. are also available on Request.

### Optional Accessory

SL.Bot3102	(1) Bottle, HDPE, Aspiration, White, 5L, Neck id-φ70, φ200×h360mm
SL.Bot3103	, 10L, -φ70, φ250×h460mm
SL.Bot3104	, 20L, -φ95, φ300×h555mm
SL.Bot3105	, 50L, -φ95, φ380×h700mm
SL.Bot3106	(2) Bottle, HDPE, Aspiration, Amber, 5L, Neck id-φ70, φ200×h360mm
SL.Bot3107	, 10L, -φ70, φ250×h460mm
SL.Bot3108	, 20L, -φ95, φ300×h555mm
SL.Bot3109	, 50L, -φ95, φ380×h700mm

### Spare Filter & UV Lamp

Cat. No.	Description	Filter Replace Period
DH.WWP.PR10AC	(3) 10" A/C Filter	Approx. 3~4 Month
DH.WWP.10PF	(4) 10" Prefilter for HMC-PT-3	20 ~ 40 Day
DH.WWP.ROM1	(5) P.NIX RO Pack I	Approx. 1 Year
DH.WWP.0.2CF	(6) 0.2 μm Final Capsule Filter	Approx. 6~8 Month
DH.WWP.UPS	(7) P.NIX UP Pack, Scholar/Bio	Approx. 1 Year
DH.WWP.UPU	(8) P.NIX UP Pack, Scholar-UV/Integrate	Approx. 1 Year
DH.WWP.MWM	MW5000UF Filter (M)	Approx. 6~8 Month
DH.WWP.UV	UV Lamp	Using time : 2000 Hrs

• The above mentioned Filter replacement period can be changed according to various factors such as feed water condition, producing volume and so on.



*Distributed By:*  
*Pacific Laboratory Products*



Free Call: 1800 723 405  
Ph: (03) 9845 0300  
Fax: +61 3 9845 0350  
Email: [sales@pacificlab.com.au](mailto:sales@pacificlab.com.au)

**[www.pacificlab.com.au](http://www.pacificlab.com.au)**

 /PacificLabP  @PacificLabP